U. S. FOREST SERVICE
RESEARCH PAPER NC-15
AUGUST 1967

INTERMOUNTAIN STATION
Central Reference File
No. 0.73

DEVELOPMENT
of a COMPUTER
METHOD for . . .

# PREDICTING LUMBER CUTTING YIELDS

■ DANIEL E. DUNMIRE
■ GEORGE H. ENGLERTH

NORTH CENTRAL FOREST EXPERIMENT STATION
D. B. King, Director
FOREST SERVICE
U. S. DEPARTMENT OF AGRICULTURE

LIBRARY FILE COPY

## Contents


Page

Introduction ..... 1

Past Work ..... 1

Procedures ..... 2

Lumber Variability and Sample Selection ..... 2

Defect Recording ..... 3

Specifications Given to the Computer ..... 3

Comparison of Yields ..... 5

Discussion and Summary ..... 7

Literature Cited ..... 7

# Development of a Computer Method for Predicting Lumber Cutting Yields

By
Daniel E. Dunmire and George H. Englerth

## Introduction

Hardwood lumber could be used more efficiently if more information were available on what yields of specific part sizes can be cut from lumber of various species and grades. An obstacle to providing this information is a lack of standardization in part sizes. Because labor costs continue to increase, the wood-using industry has tended to focus more attention on minimizing man-hours required to produce parts than on maximizing yields from the lumber it cuts up into parts.

Recently, however, an electronic computer program has been developed to determine the grade of lumber that will give the best yield for a list of specific part sizes, and to predict what the yields will be. By furnishing part specifications on punched cards along with the characteristics of the lumber grades in question, a plant manager can find out, before he orders lumber, what grade will give the best yield. Because the computer also shows how many rips and crosscuts must be made to obtain the parts he needs, the plant manager also has a basis for estimating the labor costs to produce these parts from different grades of lumber. Furthermore, the computer can be used to compare yields among boards of specific sizes within one grade.

The importance of the problem is illustrated by the amount of lumber used in manufacture. In 1960, lumber composed 83 percent of the 14.2 billion board feet of the wood used by industry of which 48 percent, or 5.6 billion board feet, was hardwoods. When hardwood lumber is worth $150 per thousand board feet, the annual value of this lumber amounts to about 840 million dollars. A savings of even a few dollars per thousand board feet by utilizing precise yield information to obtain the full potential of the lumber would result in an annual savings of several million dollars.

The computer program was developed in a joint study of the Forest Products Laboratory and the North Central Forest Experiment Station. The objectives were twofold: (1) To develop techniques and procedures for collecting information on defects in hardwood lumber, and (2) to develop an electronic computer program for determining accurately the yields of rough parts (hereafter called cuttings) in the lumber. Both objectives required improved methods of mapping and diagraming the sizes and locations of defects in a board and transferring this information to punchcards in a form suitable for computer analysis.

Papers describing the computer program (Wodzinski and Hahm 1966) and how it can be used by management to determine maximum yield from lumber (Englerth and Dunmire 1966) have already been published.[1] The report presented here describes the procedures for collecting information on defects in hardwood lumber. The study concerns the five top grades of 4/4 hard maple lumber, but the techniques are equally applicable for other hardwood species. The report also shows that the computer program accurately predicted the yield of Clear-One-Face (C1F) cuttings for hard maple lumber.

## Past Work

In 1949 the Timber Engineering Company made lumber cutup studies on five hardwood species (National Hardwood Lumber Association 1950). Using No. 2 Common 4/4 lumber, they marked the cuttings in chalk on the boards and presented their results as utility percentages for various sizes of five grades of cuttings. These cuttings, called "Milpak", never gained acceptance by industry.

White (1948) and Wylie[2] determined yields from black walnut and hard maple, respectively,

*NOTE: Mr. Dunmire is Associate Forest Products Technologist of the North Central Forest Experiment Station. He is headquartered at the Station's field office in Carbondale, Ill., which is maintained in cooperation with the Southern Illinois University. Dr. Englerth is a Project Leader in the Division of Wood Quality at the Forest Products Laboratory, Madison, Wis., which is maintained in cooperation with the University of Wisconsin. Both the Station and the Laboratory are units of the Forest Service, U.S. Department of Agriculture.*

[1] *Names and dates in parentheses refer to Literature Cited at the end of this report.*

[2] *Wylie, Aubrey E. A statistical study of small dimension yield from hard maple. Ph. D. thesis, Coll. Forest., State Univ. N.Y. (Syracuse). 1950. 99 pp.*

by chalk-marking the cuttings on the boards. Borkenhagen (1951) made full-scale board diagrams of five softwood species on tracing paper and used transparent templates, representing box parts, to obtain yields. More recently, Thomas (1962), working with a mixture of 12 hardwood species, located defects in air-dry boards by means of a transparent sheet marked into 1x3-inch rectangles. The sheet was placed on the board and an entire rectangular area was considered defective whenever the edges touched or included a defect. The yields were calculated by a Univac computer programed to crosscut first. No allowance was made for saw kerfs.

## Procedures

### Lumber Variability and Sample Selection

In a study of this type the sample lumber must be representative of the population. To provide a statistically sound basis for selecting the sample, 7,676 4/4 hard maple boards were examined at 20 sawmills throughout the hard maple producing areas. The grade, as defined by the standard inspection rules of the National Hardwood Lumber Association (1966) for hard maple, was verified for each board, and the board width, length, and scale noted. At the same time, the number and size of the grade cuttings were recorded together with the size and number of "extra" cuttings with minimum sizes of 3 by 12 inches or 2 by 18 inches. These "extra" cuttings gave an additional measure of utility over and above grading rule definitions. The number of sample boards needed in each board grade, length-width class, and utility group was determined on the basis of this information.

Most sample boards in all grades were obtained from a mill in northern Indiana; a few in the No. 2 Common and No. 3A Common grades in sizes not available there were obtained from a mill in West Virginia. A complete set of boards in some length-width classes of the poorer grades, however, could not be obtained. For example, boards 12 inches wide and 4 feet long in the No. 2 Common and No. 3A Common grades were rare. A total of 1,580 boards of all grades amounting to 10,380 board feet were used (table 1).

All boards were air-dried when selected.

TABLE 1. — *Number and board measure of 4/4 hard maple boards used to obtain yields by lumber grade and board-length*[1]

| Lumber grade | Board-length (feet) | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | 4-5 | 6-7 | 8-9 | 10-11 | 12-13 | 14-15 | 16 | All lengths |
| | NUMBER OF BOARDS | | | | | | | |
| FAS | -- | -- | 24 | 24 | 24 | 24 | 24 | 120 |
| Select | -- | 30 | 30 | 32 | 32 | 28 | 28 | 180 |
| No. 1 Common | 56 | 65 | 68 | 68 | 69 | 68 | 61 | 455 |
| No. 2 Common | 62 | 57 | 73 | 78 | 78 | 56 | 53 | 457 |
| No. 3A Common | 67 | 49 | 64 | 51 | 63 | 38 | 36 | 368 |
| Total | 185 | 201 | 259 | 253 | 266 | 214 | 202 | 1,580 |
| | BOARD-FOOT MEASURE--KILN DRIED | | | | | | | |
| FAS | -- | -- | 145 | 182 | 213 | 246 | 293 | 1,079 |
| Select | -- | 131 | 182 | 222 | 265 | 259 | 295 | 1,354 |
| No. 1 Common | 154 | 259 | 362 | 461 | 541 | 655 | 671 | 3,103 |
| No. 2 Common | 150 | 198 | 366 | 504 | 608 | 493 | 497 | 2,816 |
| No. 3A Common | 156 | 165 | 314 | 286 | 441 | 302 | 364 | 2,028 |
| Total | 460 | 753 | 1,369 | 1,655 | 2,068 | 1,955 | 2,120 | 10,380 |

[1/] Board widths varied in approximately the same proportions as found at the 20 sawmills visited.

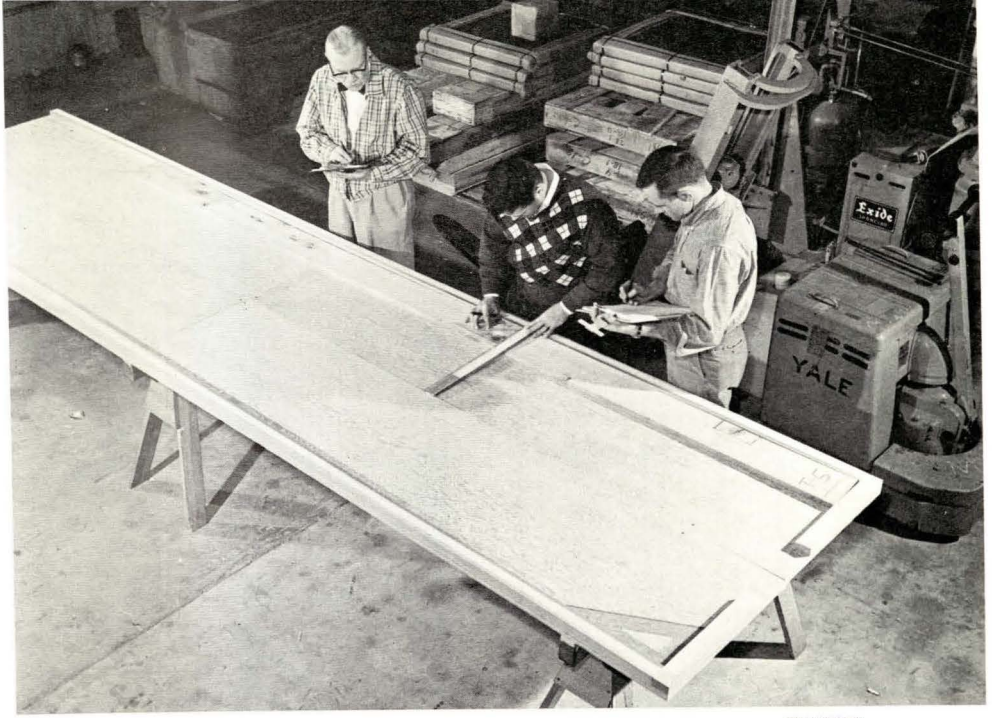


F-516560

FIGURE 1. — View of "Grid Mapper." A defect is being located by use of coordinate points on the best face of a board. The board was then turned over and placed on the opposite side of the mapper to locate defects on the poor face.

## Defect Recording

The sample boards were checked for grade by a certified National Hardwood Lumber Association inspector both before and after kiln drying to 6 percent moisture content, using a kiln schedule recommended for hard maple. Although stickers were spaced 12 inches apart, some boards warped during kiln drying, especially those in the poorer grades. Badly warped boards were ripped or crosscut or both prior to rough planing the boards to a thickness of 15/16 inch.

Next the defects were coded and recorded for size and kind by the use of a specially made "grid mapper" (fig. 1). The mapper was marked in one-quarter-inch intervals from 0 to 768 along each side to accommodate boards up to 16 feet long, and from 0 to 64 on both sides of one end for boards up to 16 inches wide. The defects were located by coordinate-intersection points to the nearest one-quarter inch. In figure 2 the location of the 1½-inch knot enclosed in a rectangle on the better face of the board is 0-59:10-82; 0 and 10 are the locations on the "y" axis along the board width, and 59 and 82 are the locations on the "x" axis along the board length. All other defects were located in a similar manner. After diagraming the best face, the board was turned over and placed on the opposite side of the mapper and the process was repeated for the poorer face. Here the location of the knot discussed above is 0-60:11-82. Later, coordinates of the defect occurring on both board faces were combined to give one set of coordinates. This was necessary for processing the data by the computer. The combining was done by diagraming each board and its defects on both faces on graph paper at a scale of 1 to 5.

## Specifications Given to the Computer

To permit a valid comparison, the specifications given to the computer for yield determination were similar to those used in marking and cutting the boards. The computer is capable of quickly calculating all possible combinations of cuttings, whereas only a few can be plotted manually. To simplify the procedure of manual plotting, cutting length was given more weight by squaring it to give length$^2$ x width ($L^2W$). For example, a 4x30-

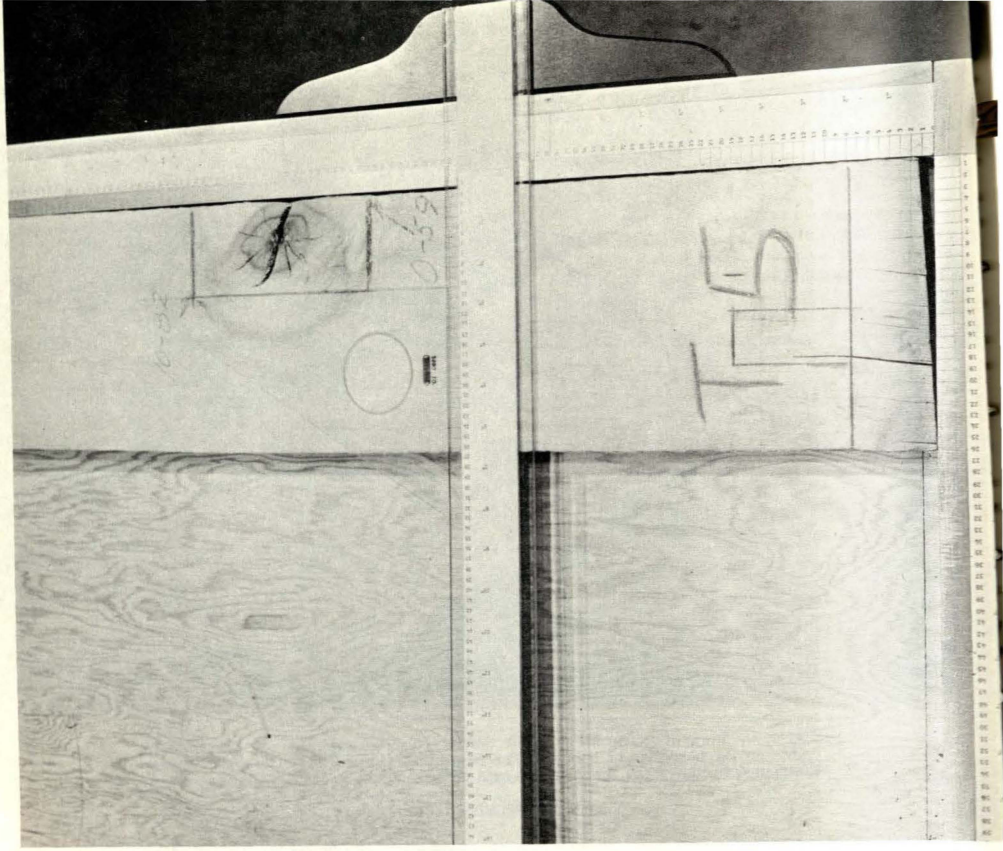

F-516561

FIGURE 2. — A knot enclosed in a rectangle with coordinate points 0-59 and 10-82.

inch cutting ($30^2 \times 4 = 3600$) is chosen over one 2x40 inches ($40^2 \times 2 = 3200$). Where the product of $L^2W$ of two cuttings were identical, priority was given to the longest cutting. The cutting having the second largest $L^2W$ product was then located and removed and so on until all cuttings in a board were found.

The saw kerfs were placed so that the cuttings could always be removed either by crosscutting or ripping or both. The width of saw kerfs was ¼ inch since that is the smallest unit used in the study. This approximates that used in industry for crosscutting, but is slightly larger than ripping kerfs.

One hundred size choices were permitted in the cutting instructions: 10 cutting widths from 1½ inches to 6 inches at ½-inch intervals for all grades, and 10 cutting lengths as follows (in inches):

| *Lumber grade* | | | |
|---|---|---|---|
| *FAS and Select* | *No. 1C* | *No. 2C* | *No. 3AC* |
| 10 | 10 | 10 | 10 |
| 20 | 20 | 15 | 14 |
| 30 | 30 | 20 | 18 |
| 40 | 40 | 25 | 22 |
| 50 | 45 | 30 | 26 |
| 60 | 50 | 35 | 30 |
| 70 | 55 | 40 | 34 |
| 80 | 60 | 45 | 38 |
| 90 | 65 | 50 | 42 |
| 96 | 70 | 55 | 46 |

Because shorter length cuttings are expected in the poorer lumber grades, the range of lengths for these was narrower. Cuttings were marked on the boards of all five grades; but when the computer

program for the three top grades worked satisfactorily, it was concluded that the other two grades need not be tested. Moreover, only C1F cuttings were programmed, although the defect data did not preclude obtaining yield data of other grades of cuttings.

Defect data, plus tables indicating the size and kind of defects permissible on each face of each grade of cutting, permitted the computer to choose the priority cuttings in a board. For example, C1F grade cuttings allow some defects on the poor face only, while such defects are permissible on both faces of sound grade cuttings (table 2).

## Comparison of Yields

As might be expected, slightly higher yields were obtained by the computer, which finds every possible combination of cutting sizes while obtaining maximum yield, in contrast to the more limited possibilities by manual board marking:

| *Lumber grade* | *Percent yield obtained by — Marking boards* | *Computer* |
|---|---|---|
| FAS | 78.1 | 80.7 |
| Select | 75.0 | 76.2 |
| No. 1 C | 67.8 | 68.1 |
| No. 2 C | 61.8 | [1] |
| No. 3 AC | 49.1 | [1] |

[1] No computer analysis was made.

The differences between the two methods were small, however — only 0.3 percent for the No. 1 Common grade, 2.6 percent for the FAS grade, and 1.2 percent for the Select grade. The important consideration is that the computer program was accurate.

The computer not only obtained somewhat better yields, but it also found a larger number of cuttings in the larger sizes. That is, it found more cuttings with a greater product of $L^2W$. Thus, in the FAS and Select grades, it obtained 77 and 52 6x96-inch cuttings, respectively, as compared to 48 and 35 obtained by board marking. Likewise, in the No. 1 Common grade the computer obtained 114 6x70-inch cuttings compared to 83 obtained by board marking.

The yields obtained by using the $L^2W$ concept may be somewhat smaller than those obtainable by using LW, a concept used in other studies. For example, a 2x60-inch cutting with a $L^2W$ product of 7,200 would be chosen over a 4x40-inch cutting with a product of 6,400. But the 4x40-inch cutting contains 40 square inches more than the 2x60-inch cutting.

A large variety of cutting sizes were obtained by using the $L^2W$ concept of delineating the cuttings. Few, if any, commercial operations would consider using such cutting instructions. These are reported to demonstrate the versatility and the accuracy of the computer program to find all possible cutting combinations.

The computer also indicated the saw cuts needed to remove the cuttings and whether the boards should be crosscut or ripped as the first operation. For boards 8 inches or less in width, a high percentage of the boards were crosscut first regardless of the lumber grade (table 3). No clear distinction was noted for boards 8¼ to 10 inches wide; but more than 70 percent or more of the boards wider than 10 inches were ripped first.

TABLE 2. — *Classification of defects that may or may not be permitted on the clear and sound faces of clear one-face hard maple cuttings; + means permitted; — means not permitted*

| Code | Defect | Clear face | | Sound face | |
|---|---|---|---|---|---|
| | | Go | No go | Go | No go |
| B | Bark pocket | | - | [1/] 1-4 | 5 |
| BL&C | Burl and check | | - | + | |
| BP | Bird peck | | - | 1-4 | 5 |
| C | Surface checks | | - | + | |
| CB | Cross break | | - | | - |
| CG | Cross grain | | - | | - |
| CW | Callus wood | + | | + | |
| D | Distorted grain | | - | | - |
| DH | Dog hole | | - | | - |
| DM | Mechanical damage | | - | | - |
| E | End trim | | - | | - |
| FN | Felling notch | | - | | - |
| FT | Felling tearout | | - | | - |
| H | Heartwood | + | | + | |
| HL | Holes, large worm | | - | 1-4 | 5 |
| HM | Holes, medium worm | | - | + | |
| HP | Holes, pinworm | | - | + | |
| HS | Holes, shot | | - | + | |
| HT | Holes, tap | | - | | - |
| KC | Knot cluster | | - | 1-4 | 5 |
| KH | Knot, loose, decayed or hole | | - | 1-2 | 3 |
| KS | Knot, sound tight | 1 | 2 | + | |
| MC | Machine - chipped or torn grain | | - | + | |
| MP | Machine snipe | | - | | - |
| MS | Mineral streak | + | | + | |
| MS&C | Mineral streak and check | | - | + | |
| MT | Machine tearout | | - | | - |
| P | Pith | | - | | - |
| PF | Pith fleck | + | | + | |
| PF&C | Pith fleck and check | | - | + | |
| R | Rot, dote, decay | | - | | - |
| S | Sap stain | | - | + | |
| SB | Brown stain | + | | + | |
| SH | Shake | | - | | - |
| SL | Saw line | | - | | - |
| SP | Split | | - | | - |
| SS | Scar, sound | | - | + | |
| ST | Sticker stain | | - | + | |
| SU | Scar, unsound | | - | | - |
| SW | Sapwood | + | | + | |
| TH | Thin | | - | | - |
| TS | Tap stain | + | | + | |
| V | Void | | - | | - |
| W | Wane | | - | | - |
| WK | Warp - crook, wavy edge | | - | | - |

[1/] Size 1 = 1/8 inch, 2 = 1/4 inch, 3 = 3/8 inch, 4 = 1/2 inch, 5 = 5/8 inch. Uncoded defects are more than size 5.

TABLE 3. — *Percentage of 4/4 hard maple boards that were cross cut or ripped as the first operation according to $L^2W$ basis of obtaining yield*

| Lumber grade | Board width (inches) | | | | | |
|---|---|---|---|---|---|---|
| | 3 - 4 | 4-1/4 - 6 | 6-1/4 - 8 | 8-1/4 - 10 | 10-1/4 - 12 | 12-1/4+ |
| FAS | | | | | | |
| Cross cut | -- | -- | 83 | 58 | 27 | 21 |
| Ripped | -- | -- | 17 | 42 | 73 | 79 |
| Select | | | | | | |
| Cross cut | -- | 100 | 91 | 55 | 29 | 23 |
| Ripped | -- | 0 | 9 | 45 | 71 | 77 |
| No. 1 Common | | | | | | |
| Cross cut | 100 | 99 | 88 | 65 | 23 | 12 |
| Ripped | 0 | 1 | 12 | 35 | 77 | 86 |
| No. 2 Common | | | | | | |
| Cross cut | 100 | 91 | 76 | 44 | 23 | 37 |
| Ripped | 0 | 9 | 24 | 56 | 77 | 63 |
| No. 3A Common | | | | | | |
| Cross cut | 100 | 87 | 69 | 41 | 12 | 25 |
| Ripped | 0 | 13 | 31 | 59 | 88 | 75 |

## Discussion and Summary

A system of locating defects in a board by intersecting coordinate points was developed and a computer program devised that used these points to locate all possible clear areas in the board. The computer determined the yields by placing any given size or sizes of cuttings in these clear areas, and furthermore stated the type, location, and number of saw cuts. The computer improved slightly on the manual act of extracting such cuttings from a board. This was demonstrated conclusively in the yields obtained from a representative sample of 4/4 hard maple lumber in the FAS, Select, and No. 1 Common lumber grades.

Yields given are for C1F cuttings where priority is given to length by using length of the cutting squared times the width ($L^2W$). The computer gave a yield of 80.7 percent for the FAS grade, 76.2 percent for Selects, and 68.1 percent for No. 1 Common. In comparison, the yields of these grades, respectively, by marking the boards were 78.1, 75.0, and 67.8 percent.

The results indicate that, by using the computer program, a plant manager can obtain an accurate estimate of the cutting yields to be expected from any specific grades and board sizes of hard maple lumber. He need only supply the cutting specifications and data on the sizes and grades of lumber he expects to use. Defect data are not yet available, however, on other species of hardwood lumber.

## Literature Cited


Borkenhagen, E. H. 1953. Lumber grades for military packaging. Forest Prod. J. 3(2): 59, 89-90.

Englerth, G. H., and Dunmire, D. E. 1966. Programing for lumber yield. Forest Prod. J. 16(9): 67-69, illus.

National Hardwood Lumber Association. 1950. The hardwood research program of NLMA. Vol I, 155 pp., illus., and Vol II, 312 pp.

National Hardwood Lumber Association. 1965. Rules for the measurement and inspection of hardwood and cypress lumber. 112 pp.

Thomas, R. J. 1962. The rough end research program. Forest Prod. J. 12(11): 536-537.

White, C. H. 1950. Walnut yields. 43 pp., illus. Amer. Walnut Manuf. Ass., Chicago, Ill.

Wodzinski, Claudia, and Hahm, E. 1966. A computer program to determine yields of lumber. U.S. Forest Serv., Forest Prod. Lab. Rep., 33 pp., illus.

## Some Recent Research Papers of the North Central Forest Experiment Station

Forest Tree Improvement Research in the Lake States, 1965, by Paul O. Rudolf. U.S. Forest Serv. Res. Pap. NC-1, 54 pp. 1966.

Estimating Investment Returns from Growing Red Pine, by Allen L. Lundgren, U.S. Forest Serv. Res. Pap. NC-2, 48 pp., illus. 1966.

Scleroderris Canker on National Forests in Upper Michigan and Northern Wisconsin, by Darroll D. Skilling and Charles E. Cordell. U.S. Forest Serv. Res. Pap. NC-3, 10 pp., illus. 1966.

Effect of Initial Moisture Content on Performance of Hardwood Pallets, by Daniel E. Dunmire. U.S. Forest Serv. Res. Pap. NC-4, 12 pp., illus. 1966.

Forest Genetics and Related Research at the Lake States Forest Experiment Station, An Annotated Bibliography, 1924-1965, by Paul O. Rudolf. U.S. Forest Serv. Res. Pap. NC-5, 35 pp. 1966.

Joint Proceedings, Second Genetics Workshop of the Society of American Foresters and the Seventh Lake States Forest Tree Improvement Conference, October 21-23, 1965, by North Central Forest Experiment Station, U.S. Forest Serv. Res. Pap. NC-6, 110 pp., illus. 1966.

Designing Efficient Logging Systems for Northern Hardwoods, Using Equipment Production Capabilities and Costs, by R. B. Gardner. U.S. Forest Serv. Res. Pap. NC-7, 16 pp., illus. 1966.

Promising Conifers for Western Iowa, by Gayne G. Erdmann. U.S. Forest Serv. Res. Pap. NC-8, 8 pp., illus. 1966.

Annotated Bibliography of Walnut and Related Species, by David T. Funk. U.S. Forest Serv. Res. Pap. NC-9, 49 pp. 1966.

A Computer Program for Evaluating Long-Term Forestry Investments, by Dennis L. Schweitzer, Allen L. Lundgren, and Robert F. Wambach. U.S. Forest Serv. Res. Pap. NC-10, 34 pp., illus. 1967.

Stadium Seating, A Market Analysis, by Jerry A. Sesco and Edwin Kallio. U.S. Forest Serv. Res. Pap. NC-11, 11 pp., illus. 1967.

Wood Brick Tile For Paneling, by Glenn A. Cooper and E. Garth Champagne. U.S. Forest Serv. Res. Pap. NC-12, 11 pp., illus. 1967.

Aspen Wood Characteristics, Properties, and Uses, A Review of Recent Literature, by Fred M. Lamb. U. S. Forest Serv. Res. Paper NC-13, 15 pp., illus. 1967.

## THE FOREST SERVICE CREED

*The Forest Service of the U.S. Department of Agriculture is dedicated to the principle of multiple use management of the Nation's forest resources for sustained yields of wood, water, forage, wildlife, and recreation. Through forestry research, cooperation with the States and private forest owners, and management of the National Forests and National Grasslands, it strives — as directed by Congress — to provide increasingly greater service to a growing Nation.*